

D&B 30-MULTI

The big brother of the 16-Multi, the 30-Multi is right at home in Australian exploration drilling.

The 30-Multi makes deeper holes and larger diameters within its capabilities, this is all possible whilst still being mounted on a smaller footprint than the 35-Multi. Historically the most popular of the D&B range.

Sold all over the world the, 30-Multi is a proven performer and is capable of tackling the jobs out of reach of the smaller rigs.

STANDARD SPECIFICATIONS

MAIN WINCH	17,000kg
RETRACT FORCE	30,000kg
RETRACT SPEED	30m/min
PULL DOWN FORCE	18,000kg
PULL DOWN SPEED	35m/min
HEAD STROKE	7m
HP	280
ENGINE	Doosan DL08
ROTATION SPEED	1100 rpm

*DEPTH CAPABILITY

PWL (114.3mm)	Up to 500m
HWL (88.9mm)	Up to 1,000m
NWL (69.9mm)	Up to 1,800m
BWL (55.6mm)	Up to 2,250m

BASIC RIG DIMENSIONS

OA LENGTH	11.5M
OA WIDTH	2.2M
OA TRANSPORT HEIGHT	2.6M
HEIGHT (MAST RAISED VERTICALLY)	11.5M
DRY WEIGHT (DEPENDING)	14T

TRUCK OR
TRACK
MOUNTED

STANDARD EQUIPMENT

SELF- LOADING JACKS
TRUCK OR TRACK
MOUNTED
30T PULLBACK 18T
PULL DOWN
IN BUILT BREAKOUT
SYSTEM
MANUAL BREAKOUT
WIRELESS REMOTE FOR
TRAMMING
6M DRILL PIPE CAPACITY
1M – 200KG JIB WINCH
HOSE COVERING
RISK ASSESSMENT

OPTIONAL EXTRAS

UPTO 1500 LPM MUD
PUMP
900CFM ON BOARD
COMPRESSOR
ROD RACK
AMERICAN TRIPLEX
PISTON PUMP
ROD LOADER
WIRELINE ARCHIMEDES
GUIDE


McCULLOCHS
DRILLING & BORING




*Under normal drilling conditions

**DISCOVER OUR
CAPABILITIES**

Call: +61 3 5445 6900
Email: sales@mccullochs.com.au
Visit: mccullochsdrilling.com



McCULLOCHS
DRILLING & BORING

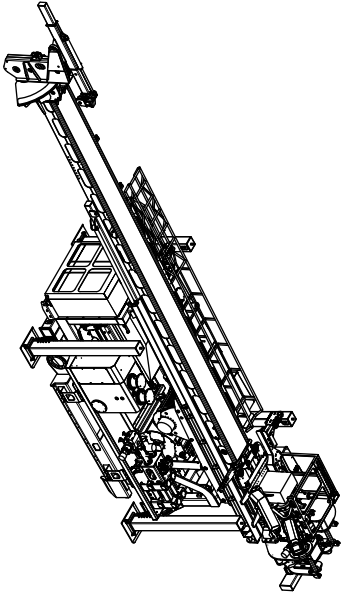

ISO VIEW

